

Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17.3" LCD Keyboard drawer
16 port PS2 or Combo KVM switch
- Built-in 17.3" LCD monitor, 1920x 1080 resolution
- Industrial keyboard with touchpad
- 1U, 521mm short depth and lightweight
- 2 thumb screws to secure 17.3" LCD monitor
- Built-in rail self-locking device
- Tempered glass protect LCD screen

KVM switch


- 16 port PS2 or Combo KVM switch
- Support password protection and server name
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key, OSD manu
- Firmware upgrades to all the chained KVM switch via the KVM cable connects to port 1 (Combo KVM only)
- Auto scan mode. Easy to monitor server operation
- Superior video bandwidth up to 200MHz
- LED display for status monitor
- Buzzer sound for server switched confirmation

Specification

| Model No | AMK516-PB | AMK516-CB |
|-------------------|---|--------------------------|
| Construction | Heavy-duty steel | |
| Drawer design | 1U, single slide rail LCD KB drawer for 19" cabinet | |
| Display | 17.3", 1920x 1080 resolution with tempered glass | |
| Protection | Tempered glass protect LCD screen | |
| Physical security | 2 thumb screws to secure LCD monitor | |
| KVM switch | 16 port PS2 KVM switch | 16 port Combo KVM switch |
| Port connection | Daisy chain up to 8 levels to support up to 128 sets | |
| Port selection | 16x Front push buttons, OSD Manu, Hotkey | |
| LED indication | Power LED indicates a computer is connecting Operation LED indicates the port has been selecting | |
| Keyboard | Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US | |
| Power supply | Built-in 60W, 90~264VAC, Operating temp.: -20~70°C | |
| Power consumption | 3 watts stand-by, 25 watts in-use | |
| Dimension | 442.4x 44x 521.6mm (Wx Hx D) | |
| Weight | 11 kgs | |
| KVM cable | 16x 1.8m PS2 KVM cable | 16x 1.8m USB KVM cable |

Environmental Factors

| | Operating | Non-Operating |
|-------------------|---------------|---------------|
| Temperature | 0°C~50°C | -20°C~60°C |
| Relative Humidity | 10%~90% | 10%~95% |
| Approval | CE, FCC, RoHS | |

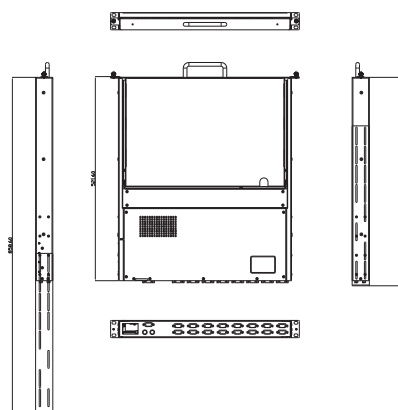

Ordering Information

AMK516-17WPBUS

1U, 17.3", 1920x 1080, 16-port PS2 KVM with 16x 1.8m PS2 cables

AMK516-17WCBUS

1U, 17.3", 1920x 1080, 16-port Combo KVM with 16x 1.8m USB cables

Option:

80W, 24~48VDC power supply

1.8m, 3.0m, 5.0m KVM cable

Keyboard layout: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US